

PAPER • OPEN ACCESS

Sub-picosecond timing jitter between optically synchronized femtosecond and picosecond laser systems

To cite this article: Zhenfei Jiang *et al* 2023 *Meas. Sci. Technol.* **34** 065203

View the [article online](#) for updates and enhancements.

You may also like

- [\(Invited\) Discovering Bottlenecks and Opportunities in Hybrid Solar Light Harvesting Systems By Ultrafast X-Ray Spectroscopy](#)
Oliver Gessner
- [Comparison between femtosecond and nanosecond laser ablation of solution samples applied on a substrate](#)
T Kato, T Kobayashi, Y Matsuo et al.
- [Resolving XUV induced femtosecond and attosecond dynamics in polyatomic molecules with a compact attosecond beamline](#)
V Lorient, A Marciniak, L Quintard et al.

Sub-picosecond timing jitter between optically synchronized femtosecond and picosecond laser systems

Zhenfei Jiang^{1,2,*} , Benjamin Strycker^{1,3}, Lucian Hand⁴, Jonas Adamonis⁴, Zhenhuan Yi¹, Alexei Sokolov^{1,2} and Marlan Scully^{1,2}

¹ Institute for Quantum Science and Engineering, Texas A&M University, College Station, TX 77843, United States of America

² Department of Physics and Astronomy, Texas A&M University, College Station, TX 77843, United States of America

³ Baylor Research and Innovation Collaborative, Baylor University, Waco, TX 76704, United States of America

⁴ Ekspla UAB, Vilnius, Lithuania

E-mail: zhenfei_jiang@tamu.edu

Received 30 November 2022, revised 25 February 2023

Accepted for publication 14 March 2023

Published 28 March 2023



Abstract

Synchronized optical pulses are widely used. We report here characterization and measurement of synchronized femtosecond and picosecond pulses from a Ti:Sapphire laser (nominally 800 nm) and a Nd:YAG laser (1064 nm), respectively. Synchronization is achieved by utilizing soliton self-frequency shift in a photonic-crystal fiber that allows the 800 nm femtosecond oscillator to seed the third-harmonic generation (355 nm) of picosecond regenerative amplifier. The relative timing jitter between the amplified femtosecond and the third-harmonic generation of picosecond pulses is (710 ± 160) fs, which is only $(1.17 \pm 0.26)\%$ of the picosecond pulse duration. This work paves way for applications in stimulated Raman scattering spectroscopy and amplification.

Supplementary material for this article is available [online](#)

Keywords: synchronization, femtosecond and picosecond laser, relative timing jitter

(Some figures may appear in colour only in the online journal)

1. Introduction

Timing is everything [1], from devices we use in everyday life to high precision synchronization on remote platforms [2]; from atoms emitting light collectively [1] to super-charged quantum beat engines [3]; there is no better time to

improve our understanding and technologies for good timing. Developments in ultrafast optics have facilitated direct optical frequency/time measurements [4], as well as tools to probe the fast microscopic world of atoms and molecules. Nowadays, picosecond, femtosecond, and even attosecond optical pulses can be routinely obtained. While dynamics of electronic bound states can be as fast as attosecond [5], molecular dynamics often lays between femtosecond to picosecond time scale. To this end, synchronized femtosecond and picosecond laser systems are of great importance in physics and physical chemistry due to their many valuable applications such as pump-probe spectroscopy, stimulated Raman scattering spectroscopy, coherent anti-Stokes Raman spectroscopy

* Author to whom any correspondence should be addressed.



Original content from this work may be used under the terms of the [Creative Commons Attribution 4.0 licence](#). Any further distribution of this work must maintain attribution to the author(s) and the title of the work, journal citation and DOI.

surface properties probing by using vibrational sum frequency generation spectroscopy, two-photon laser scanning fluorescence microscopy, coherent synthesis, and optical parametric chirped-pulse amplification [6–13]. It has also been shown that stimulated Raman scattering in plasma can compress and amplify laser pulses [14], potentially to reach petawatt power [15]. In such a system, synchronized picosecond pump and femtosecond seed pulses need to interact in high density plasma in a counter-propagating manner.

In general, to synchronize the outputs of independent femtosecond and picosecond lasers, one can either synchronize two oscillators with at least one having tunable cavity length, or use a single oscillator to seed separate picosecond and femtosecond regenerative amplifiers. There are many works in literature which have achieved optical synchronization between independent femtosecond laser pulses using the tunable cavity method, e.g. optical clock synchronization [2], synchronization of mode-locked lasers [16, 17] and seeded synchronization of coupled optical microresonators [18]. Otherwise, Zou *et al* have experimentally demonstrated the synchronization between the internal dynamics of optical soliton molecules and external signals [19]. In another example of synchronization between femtosecond and picosecond pulses, Juhasz *et al* synchronized pulses from a stabilized femtosecond and a tunable picosecond laser using a linear cavity configuration in both lasers [20]. Zhu *et al* generated synchronous femtosecond and picosecond pulses by achieving cross mode locking in a double-cavity, dual wavelength Ti:Sapphire laser [11]. In their work, the femtosecond pulse width is $\tau_{2FWHM} = 45.2$ fs and the picosecond pulse width is $\tau_{1FWHM} = 0.89$ ps, which is about 20 times longer than the duration of the femtosecond pulse. The jitter is calculated to be 41 fs, which is about 4.6% of the duration of the picosecond pulse. The latter method obviously can be complicated by the use of different gain media and corresponding lasing wavelengths. Hommel and Allen reported broad-bandwidth sum frequency generation (BBSFG) techniques, which used infrared broad-bandwidth femtosecond pulses overlapped with narrow-bandwidth picosecond pulses to obtain BBSFG spectra [21]. In their system, by splitting a single seed source for injection into the amplifiers, the femtosecond pulse and the picosecond pulse were generated in separate regenerative amplifiers and temporally overlapped. Nonetheless, the difficulty can be lifted by soliton self-frequency shift (SSFS).

SSFS is a consequence of Raman self-pumping that continuously red-shifts a soliton pulse. Recently, it has been widely investigated for applications in fiber-based sources and signal processing [22–25]. Due to Raman gain, the blue portion of the soliton spectrum pumps the red portion, causing a continuous red-shift in the soliton spectrum as it propagates. The first observation of SSFS in a standard photonic-crystal fiber (PCF) structure was reported in 2002 [26]. It was closely followed by a study in which Raman-shifted outputs were observed from a PCF pumped by 800 nm femtosecond pulses [27]. After that, many different kinds of fiber platforms, such

as single-mode fiber, microstructured fiber, and higher order mode fiber were investigated [28–31]. Meanwhile, a number of applications, including wavelength-agile lasers, analog-to-digital conversion, and slow light, were considered [28]. Worth noting, A. Baltuska and his collaborators were the first to report a method of red-shifting a soliton in a photonic-crystal fiber to allow 800 nm Ti:Sapphire oscillator to seed a 1 μ m Nd regenerative amplifier [32]. They first proposed and demonstrated the use of SSFS in photonic-crystal fibers to generate picojoule-level seed energy for high-power ytterbium- or neodymium-based amplifiers. The method attracted much attention and was commercialized by EKSPLA [33, 34]. However, the relative timing jitter, as an important quantity and can determine whether the laser source is ‘quite’ enough for the intended application, had not been measured by optical cross-correlation techniques. Depending on the photonic-crystal fiber and frequency-shifted mechanism, the amplitude noise will translate to the frequency-shifted radiation, resulting in a timing jitter. And the timing jitter is a crucial issue for all timing sensitive applications [35]. For instance, a detailed analysis of optical frequency-shifting mechanisms in photonic-crystal fibers has been presented by Rothhardt *et al* [36]. In addition, a relative intensity noise and timing jitter of a Raman soliton has been studied by Zhou *et al* [37]. Both laser sources in above works are femtosecond pulses and have short pulse duration. To our best knowledge, there is no report on timing jitter between a femtosecond laser and a picosecond laser system seeded by a SSFS pulse from a PCF. In this work, we report a technique for characterization of the relative timing jitter between femtosecond and picosecond pulses. The relative timing jitter is measured as (710 ± 160) fs, which is only $(1.17 \pm 0.26)\%$ of the picosecond pulse duration.

2. Description of laser systems and pulse characterization

The schematic of our laser systems is shown in figure 1. The femtosecond system consists of an oscillator (Spectra-Physics, MaiTai SP) and an amplifier (Spectra-Physics, Spitfire Ace, SPTF-35F-1-HPACE). The picosecond laser system includes a regenerative amplifier and a power amplification stage (EKSPLA, PL2251-10-P60) and an amplifier with integral harmonic upconversion of the fundamental beam (EKSPLA, APL2101-10-P60-SH-TH-FH). A phase-locked loop circuit converts the 47.5 MHz photodiode signal, originates from the pulse round-trip time in the oscillator cavity, to a 10 MHz clock signal, which is used to achieve electronic synchronization on the order of 1 ns to 2 ns between the femtosecond and picosecond systems. Key to the function, a PCF is installed between the femtosecond and picosecond laser systems, to allow the 800 nm Ti:Sapphire femtosecond oscillator to seed the 1064 nm picosecond regenerative amplifier, achieving synchronization of the two lasers. The photonic-crystal fiber (Product code: PL2250-FS Option) is a commercial

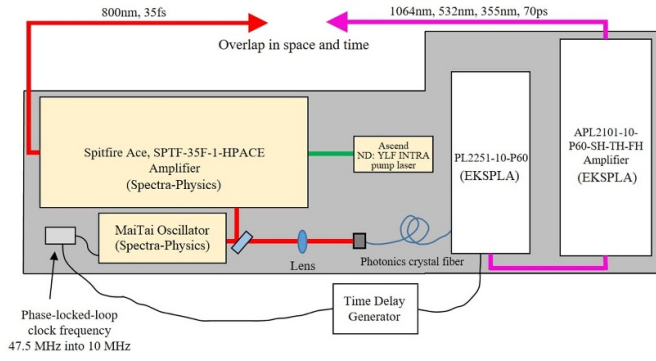


Figure 1. Schematic diagram of femtosecond and picosecond laser systems.

off-the-shelf solution produced by EKSPLA. The authors have been requested to withhold description of its characteristics.

Our femtosecond laser oscillator has a pulse duration about 35 fs according to the specification. To verify this, we use a lab-built spatial autocorrelation to measure the duration of the pulses, in the manner of Raghuramaiah's work [38]. The setup is shown in figure S1(a). By integrating over the spatial dimension that is perpendicular to the plane P (in this case the vertical y direction, as shown in figure S1(c)), an intensity as a function of time is obtained. This is shown in figure 2(a), where the x -axis represents time and the y -axis denotes the intensity of the pulse. The transform-limited full-width at half-maximum (FWHM) pulse duration is $\bar{\tau}_{\text{FWHM}} = 38.5$ fs. Worth noting, the FWHM pulse duration is calculated based on a fitted curve which is generated from a Gaussian function.

The duration of the picosecond pulse is measured with a streak camera (C10910-02, Hamamatsu) after passing through absorptive filters. The picosecond pulse is the third harmonic generation of the Nd:YAG laser, which has a wavelength of 355 nm. The statistics result of 100 shots is shown in figure 2(b), and it presents a Gaussian-like temporal profile with pulse duration of $\bar{\tau}_{\text{FWHM}} = 57.72$ ps. Similarly, the FWHM pulse duration is calculated from the Gaussian fitted curve.

3. Jitter between pulses

In general, relative timing jitter between ~ 40 fs and ~ 60 ps pulses is difficult to measure because the duration of the picosecond pulse is about 1500 times longer than the duration of the femtosecond pulse. We accomplished accurate jitter characterization through calibrated use of a high-resolution streak camera (C10910-02, Hamamatsu). The setup is shown in figure 3. Importantly, we measured the error in the timing between the femtosecond and picosecond pulses by splitting the femtosecond pulse into two and using the second pulse as a timing reference, assumed to have a negligible jitter with respect to the first femtosecond pulse. We split the femtosecond pulse into two by reflecting the femtosecond beam

off a 5 mm thick fused silica window. One pulse is reflected by the front surface, and the second pulse is reflected by the back surface. Worth noting, there is no appreciable spatial separation of the pulses, only temporal. The pulses subsequently pass through an absorptive neutral density filter, a wedge, and an iris. Both femtosecond and picosecond signals are collected by the streak camera which is used to characterize the duration of the picosecond pulses. In addition, the half wave plate and thin film polarizer are used to control the laser power.

A single measurement is shown in figure 4. During the analysis, a Gaussian function $I(t) = I(0)e^{-(t-t_0)^2/2\sigma_G^2}$ is used to fit the pulses, where t_0 denotes the central time and σ_G denotes a standard deviation measure of the pulse duration. We denote T_1 as the timing between the picosecond pulse and the first femtosecond pulse, while T_2 is the timing between two femtosecond pulses. A finite width in the T_2 distribution represents the instrument error, since the second femtosecond pulse has negligible jitter with respect to the first femtosecond pulse. By analyzing the statistics of 1000 individual shots, we can calculate the distributions of T_1 and T_2 , from which the jitter between the femtosecond and picosecond pulses is derived. The distributions of T_1 and T_2 are shown in figure 5. They represent the time jitter distributions of femtosecond and picosecond pulses respectively. In figure 5, σ denotes the standard deviation width of the time distribution. The nonzero distribution in the timing T_2 between two femtosecond pulses with physically negligible jitter shows that the distribution of the timing T_1 is actually a convolution of two Gaussian distributions: the first is the true timing jitter between the picosecond and femtosecond pulses, and the second is the distribution in T_2 , which signifies the measurement error of the streak camera. Since the convolution of two Gaussian distributions is again a Gaussian distribution [39], the true timing jitter between the picosecond and femtosecond pulses is shown to be $\sqrt{\sigma_1^2 - \sigma_2^2} = (710 \pm 160)$ fs [39]. The uncertainty in this jitter is derived from the uncertainty in the Gaussian fits. It is worth pointing out, when the duration of the picosecond pulse is about 1500 times longer than the duration of the femtosecond pulse, our jitter is just $(1.17 \pm 0.26)\%$ of the picosecond pulse duration.

There are several possible sources of timing jitter. For our system, air current fluctuations affected the coupling efficiency of the femtosecond seeding pulses into the photonic-crystal fiber, resulting in spectrum fluctuations at the output. Stability was improved upon shielding the system from these air current fluctuations. A second source of timing jitter results from intensity fluctuations in the femtosecond laser itself, leading to spectral and temporal fluctuation at the fiber output. These laser intensity fluctuations were present but they were of minimal consequence. Finally, a possible source of the picosecond amplified pulse jitter is the amplification process seeded by the output of the PCF.

The sensitivity of our jitter measurement system, based on a streak camera, depends on several factors, including the temporal resolution of the streak camera and the

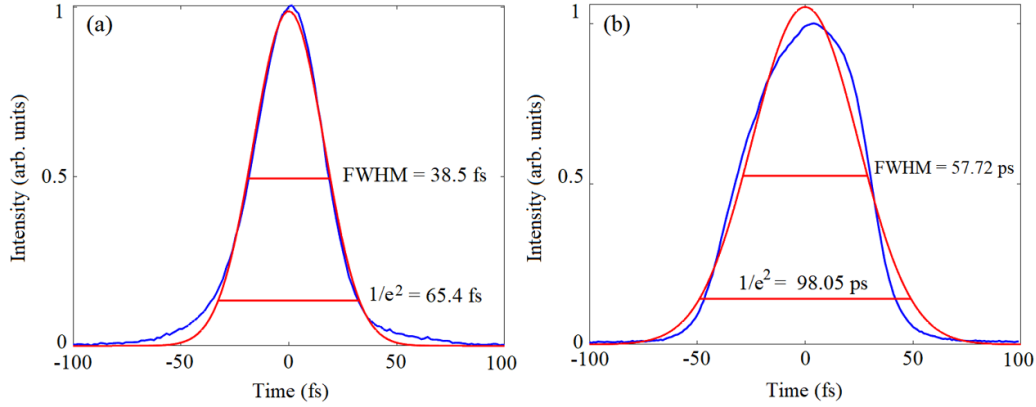


Figure 2. Intensity of femtosecond and picosecond laser pulses. Blue line is real data we collected while red line is a fitted curve. (a) Femtosecond pulse duration $\bar{\tau}_{FWHM}$ is 38.5 fs, and full width at $1/e^2$ is 65.4 fs; (b) picosecond pulse duration $\bar{\tau}_{FWHM}$ is 57.72 ps, and full width at $1/e^2$ is 98.05 ps.

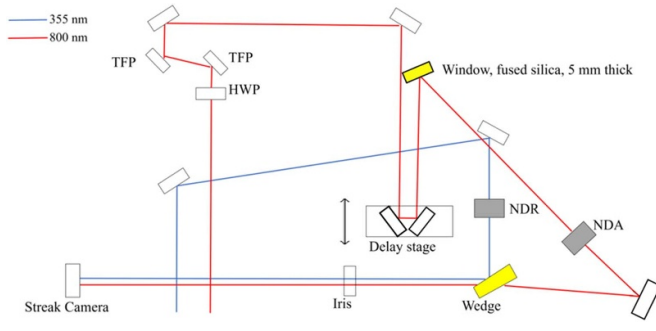


Figure 3. Setup to measure relative timing jitter between femtosecond and picosecond pulses. NDR: neutral density reflective filter, NDA: neutral density absorptive filter, HWP: half wave plate, TFP: thin film polarizer.

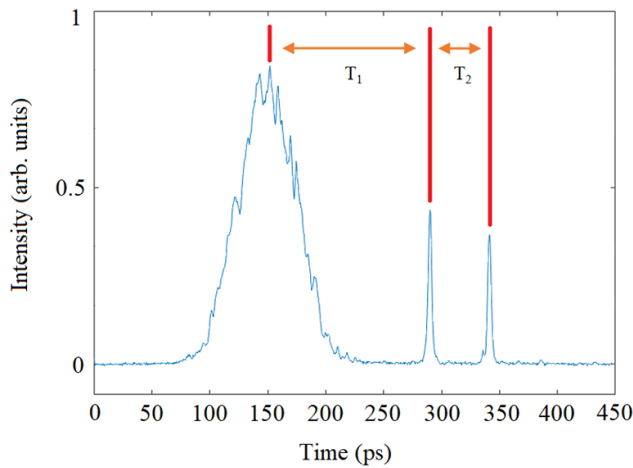


Figure 4. Intensity of femtosecond and picosecond laser pulses. T_1 is the timing between the picosecond pulse and the first femtosecond pulse. T_2 is the timing between two femtosecond pulses, and it is the instrument error since one assumed the second femtosecond pulse is timing reference.

signal-to-noise ratio (SNR) of the detection procedure. The temporal resolution of the streak camera is a crucial factor in determining its sensitivity to jitter. The higher the temporal

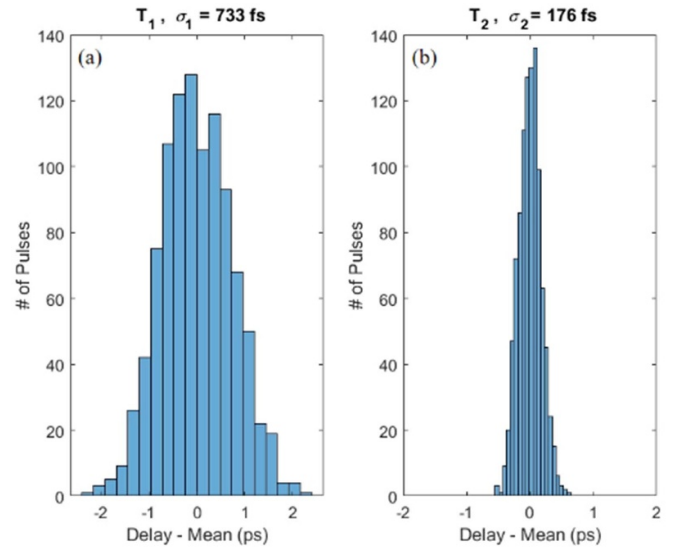


Figure 5. (a) Delay between picosecond and the first femtosecond pulses. (b) Delay between two reference femtosecond pulses. Each figure contains 1000 shots of the timing measurement. σ denotes the standard deviation width of time distribution.

resolution, the finer the measurement of the jitter in the signal. Our measurements used a streak camera with temporal resolution of 1.1 ps per pixel. In addition, the SNR of the detection system is also an important factor. A higher SNR means that the measurement system can detect smaller variations in the signal, which can lead to a higher sensitivity to jitter. The sensitivity of the jitter measurement procedure can be improved by using techniques such as averaging and signal filtering. Here, the total sensitivity of our jitter measurement system is about 34 fs because we averaged 1000 pulses. Consequently, our jitter measurement of (710 ± 160) fs is well-resolved.

The measured value of the jitter is comparable to that achieved in other works. In Chen's work, synchronization of the femtosecond and picosecond laser regenerative amplifiers with two different cavities was achieved by utilizing an electronic phase-locked loop and global clock techniques [6]. The

timing jitter of the two regenerative amplifiers was measured as 0.66 ps.

4. Conclusion

In summary, we have characterized the duration and relative timing jitter of femtosecond and picosecond laser pulses generated from separate laser cavities that have been optically synchronized through SSFS. Although the method was first demonstrated by Baltuska [32], we have characterized the jitter between the femtosecond and picosecond laser system seeded by a SSFS pulse in a photonic-crystal fiber for the first time. Experimental results show that the relative timing jitter between the femtosecond and picosecond pulses is only $(1.17 \pm 0.26)\%$ of the picosecond pulse duration, while the duration of the picosecond pulse is about 1500 times longer than the duration of the femtosecond pulse. Our results pave the way for measuring and improving the temporal resolution in stimulated Raman scattering spectroscopy and amplification. It is worth pointing out that getting a good jitter will contribute to our future work in stimulated Raman scattering spectroscopy. Relative timing jitter plays an important role in many scattering media, such as plasma channels. As discussed in the [40], two separate pulses are counter-propagating and synchronizing with the plasma channel. The length of plasma channel is about 4 mm. Since our jitter is less than 1 ps, it means two pulses can be synchronized within the length range of 0.3 mm. This is an excellent range and shows that our system is good for experiments with plasma channel length of less than 1 mm.

Data availability statement

The data that support the findings of this study are openly available at the following URL/DOI: <https://osf.io/thw69/>.

Acknowledgments

We would like to thank Dr. Alexander Goltsov for discussing experimental details with us. We acknowledge support of Air Force Office of Scientific Research (Award No. FA9550-20-1-0366 DEF), Office of Naval Research (Award No. N00014-20-1-2184) and Robert A Welch Foundation (Grant No. A-1261), ZJ is supported by the Herman F Heep and Minnie Belle Heep Texas A&M University Endowed Fund held/administered by the Texas A&M Foundation.

Conflict of interest

The authors declare no conflicts of interest.

ORCID iD

Zhenfei Jiang  <https://orcid.org/0000-0002-4608-1294>

References

- [1] Scully M O, Fry E S, Ooi C H R and Wódkiewicz K 2006 Directed spontaneous emission from an extended ensemble of N atoms: timing is everything *Phys. Rev. Lett.* **96** 010501
- [2] Bergeron H, Sinclair L C, Swann W C, Khader I, Cossel K C, Cermak M, Deschênes J-D and Newbury N R 2019 Femtosecond time synchronization of optical clocks off of a flying quadcopter *Nat. Commun.* **10** 1819
- [3] Kim J, Oh S, Yang D, Kim J, Lee M and An K 2022 A photonic quantum engine driven by superradiance *Nat. Photon.* **16** 707–11
- [4] Diddams S A, Jones D J, Ye J, Cundiff S T, Hall J L, Ranka J K, Windeler R S, Holzwarth R, Udem T and Hänsch T W 2000 Direct link between microwave and optical frequencies with a 300 THz femtosecond laser comb *Phys. Rev. Lett.* **84** 5102–5
- [5] Chini M, Zhao B, Wang H, Cheng Y, Hu S X and Chang Z 2012 Subcycle AC stark shift of helium excited states probed with isolated attosecond pulses *Phys. Rev. Lett.* **109** 073601
- [6] Chen L, Wen S, Wang Y, Zhao C, Qian L and Fan D 2010 Synchronization and relative timing jitter measurement of femtosecond and picosecond laser regenerative amplifiers *IEEE J. Quantum Electron.* **46** 1354–9
- [7] Shen Y R 1989 Surface properties probed by second-harmonic and sum-frequency generation *Nature* **337** 519–25
- [8] Shelton R K 2001 Phase-coherent optical pulse synthesis from separate femtosecond lasers *Science* **293** 1286–9
- [9] Oron D, Dudovich N, Yelin D and Silberberg Y 2002 Narrow-band coherent anti-stokes Raman signals from broad-band pulses *Phys. Rev. Lett.* **88** 063004
- [10] Chalus O, Bates P K, Smolarski M and Biegert J 2009 Mid-IR short-pulse OPCPA with micro-Joule energy at 100kHz *Opt. Express* **17** 3587
- [11] Zhu C, Wang Y, He J, Wang S and Hou X 2005 Generation and evaluation of synchronous femtosecond and picosecond pulses in a dual-wavelength Ti:Sapphire laser *J. Opt. Soc. Am. B* **22** 1221
- [12] Zhu Q et al 2018 The Xingguang-III laser facility: precise synchronization with femtosecond, picosecond and nanosecond beams *Laser Phys. Lett.* **15** 015301
- [13] Tian H, Song Y, Meng F, Fang Z, Hu M and Wang C 2016 Long-term stable coherent beam combination of independent femtosecond Yb-fiber lasers *Opt. Lett.* **41** 5142
- [14] Malkin V M, Shvets G and Fisch N J 1999 Fast compression of laser beams to highly overcritical powers *Phys. Rev. Lett.* **82** 4448–51
- [15] Trines R M G M, Alves E P, Webb E, Vieira J, Fiúza F, Fonseca R A, Silva L O, Cairns R A and Bingham R 2020 New criteria for efficient Raman and Brillouin amplification of laser beams in plasma *Sci. Rep.* **10** 19875
- [16] Crooker S A, Betz F D, Levy J and Awschalom D D 1996 Femtosecond synchronization of two passively mode-locked Ti:Sapphire lasers *Rev. Sci. Instrum.* **67** 2068–71
- [17] Yu T, Jiang S, Fang J, Liu T, Wu X, Yan M, Huang K and Zeng H 2022 Passive repetition-rate stabilization for a mode-locked fiber laser by electro-optic modulation *Opt. Lett.* **47** 1178
- [18] Jang J K, Klenner A, Ji X, Okawachi Y, Lipson M and Gaeta A L 2018 Synchronization of coupled optical microresonators *Nat. Photon.* **12** 688–93
- [19] Zou D, Song Y, Gat O, Hu M and Grell P 2022 Synchronization of the internal dynamics of optical soliton molecules *Optica* **9** 1307

- [20] Juhasz T, Smith G O, Mehta S M, Harris K and Bron W E 1989 Generation and kilohertz rate amplification of synchronized femtosecond and picosecond laser pulses *IEEE J. Quantum Electron.* **25** 1704–7
- [21] Hommel E L and Allen H C 2001 Broadband sum frequency generation with two regenerative amplifiers: temporal overlap of femtosecond and picosecond light pulses *Anal. Sci.* **17** 137–9
- [22] Zakharov V E and Shabat A 1972 Exact theory of two-dimensional self-focusing and one-dimensional self-modulation of waves in nonlinear media *J. Exp. Theor. Phys.* **34** 62–69
- [23] Hasegawa A and Tappert F 1973 Transmission of stationary nonlinear optical pulses in dispersive dielectric fibers. I. Anomalous dispersion *Appl. Phys. Lett.* **23** 142–4
- [24] Satsuma J and Yajima N 1974 B. initial value problems of one-dimensional self-modulation of nonlinear waves in dispersive media *Prog. Theor. Phys. Suppl.* **55** 284–306
- [25] Mollenauer L F, Stolen R H and Gordon J P 1980 Experimental observation of picosecond pulse narrowing and solitons in optical fibers *Conf. on Lasers and Electro-Optics* (OSA) (<https://doi.org/10.1103/PhysRevLett.45.1095>)
- [26] Reid D T, Cormack I G, Wadsworth W J, Knight J C, St P and Russell J 2002 Soliton self-frequency shift effects in photonic crystal fibre *J. Mod. Opt.* **49** 757–67
- [27] Cormack I G, Reid D T, Wadsworth W J, Knight J C, St P and Russell J 2002 Observation of soliton self-frequency shift in photonic crystal fibre *Electron. Lett.* **38** 167
- [28] Lee J H, van Howe J, Xu C and Liu X 2008 Soliton self-frequency shift: experimental demonstrations and applications *IEEE J. Sel. Top. Quantum Electron.* **14** 713–23
- [29] Zhu Z and Brown T G 2004 Effect of frequency chirping on supercontinuum generation in photonic crystal fibers *Opt. Express* **12** 689
- [30] Chan M-C et al 2008 1.2- to 2.2- tunable Raman soliton source based on a Cr: forsterite-laser and a photonic-crystal fiber *2008 Conf. on Lasers and Electro-Optics* (IEEE) vol 20 pp 900–2
- [31] Hage C H, Kibler B, Andresen E R, Michel S, Rigneault H, Courjaud A, Mottay E, Dudley J M, Millot G and Finot C 2011 Optimization and characterization of a femtosecond tunable light source based on the soliton self-frequency shift in photonic crystal fiber *Proc. SPIE* **8071** 3341–6
- [32] Teisset C Y, Ishii N, Fuji T, Metzger T, Köhler S, Holzwarth R, Baltuska A, Zheltikov A M and Krausz F 2005 Soliton-based pump-seed synchronization for few-cycle OPCPA *Opt. Express* **13** 6550
- [33] Tavella F, Marcinkevicius A and Krausz F 2006 90 mJ parametric chirped pulse amplification of 10 fs pulses *Opt. Express* **14** 12822
- [34] Tavella F, Nomura Y, Veisz L, Pervak V, Marcinkevicius A and Krausz F 2007 Dispersion management for a sub-10-fs, 10 TW optical parametric chirped-pulse amplifier *Opt. Lett.* **32** 2227
- [35] Wood D 1990 Constraints on the bit rates in direct detection optical communication systems using linear or soliton pulses *J. Light Technol.* **8** 1097–106
- [36] Rothhardt J, Heidt A M, Hädrich S, Demmler S, Limpert J and Tünnermann A 2012 High stability soliton frequency-shifting mechanisms for laser synchronization applications *J. Opt. Soc. Am. B* **29** 1257
- [37] Zhou G, Xin M, Kaertner F X and Chang G 2015 Timing jitter of Raman solitons *Opt. Lett.* **40** 5105
- [38] Raghuramaiah M, Sharma A K, Naik P A, Gupta P D and Ganeev R A 2001 A second-order autocorrelator for single-shot measurement of femtosecond laser pulse durations *Sadhana* **26** 603–11
- [39] Press W H (ed) 1996 *FORTRAN Numerical Recipes* 2nd Edn (Cambridge: Cambridge University Press)
- [40] Wu Z, Chen Q, Morozov A and Suckewer S 2019 Stimulated Raman backscattering amplification with a low-intensity pump *Phys. Plasmas* **26** 103111